English

SRP-330II

3 inch Thermal POS Printer

Retail | Restaurants & Bars | Ticketing | Banking

Durable and Cost-Efficient






Cost-Efficiency

- All in one Plus™ Interface
  - Triple Interface
    USB V2.0 FS + Ethernet + Serial
  - Dual Interface
    USB V2.0 FS + Serial
    USB V2.0 FS + Parallel
    USB V2.0 FS + SD
- Paper saving mode, reducing the length of a receipt up to 25%



Reliable Printing Performance

- Printing speed up to 220 mm/sec
- High reliability mechanism :
  150 km TPH & 1.5 Million cuts Auto Cutter
- 203 dpi supported

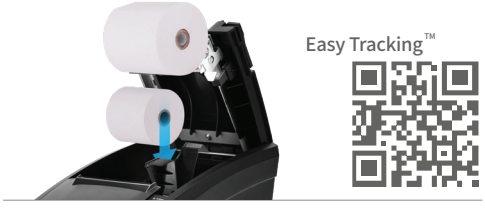

User-Friendly Design

- Stand-alone or space-saving wall-mount use
- 2” or 3” paper choice
- 2 inch partition included
- Anti-jam guide
- Easy Tracking™ supports a QR code linking to the technical support micro site on a unique label plate found on the bottom of the printer

BIXOLON®
a Better Solution for your Business™

SRP-330II

3 inch Thermal POS Printer

Specifications

Print Characteristics

Print Method
Direct Thermal

Print Speed
Up to 220 mm/sec

Print Resolution
SRP-330II: 180 dpi
SRP-332II: 203 dpi

Print Width
Up to 72 mm

Sensor
Paper End, Cover Open

Media Characteristics

Media Type
Receipt

Media Width
80 mm
Optional 58 mm (N type)

Media Roll Diameter
Up to 80 mm

Media Thickness
0.05 ~ 0.08mm

Supply Method
Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)
145 x 198 x 146 mm
(5.72 x 7.79 x 5.74 inch)

Weight
1.37 kg (3.02 lbs.)

Electrical
EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port
2 ports (via y-type adaptor)

Performance Characteristics

NV Image Memory
768 Kbytes (Mono)

Receive Buffer
4 Kbytes

User Define Buffer
12 Kbytes

Interface
① USB V2.0 FS + Ethernet + Serial
② USB V2.0 FS + Serial
③ USB V2.0 FS + Parallel
④ USB V2.0 FS + SD

Environment Characteristics

Temperature
Operating: 0 ~ 40°C (32 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity
Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)
150 km

Auto Cutter
1.5 Million Cuts

***** Specified Paper**
- TF50KS-E (Paper thickness: 65µm)
  : Nippon Paper industries Co., Ltd.
- PD 150R (Paper thickness: 75µm)
  : New Oji Paper Mfg, Co., Ltd
- PD 160R (Paper thickness: 75µm)
  : New Oji Paper Mfg, Co., Ltd.
- P350 (Paper thickness: 62µm)
  : Kansaki Specialty Paper, Inc. (USA)

Software

Emulation
BXL / POS

Driver / Utility
Windows Driver, OPOS / JPOS Driver,
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program

SDK / Plugin
Android / iOS / Windows SDK, Linux SDK,
Xamarin SDK, Chrome SDK, Cordova Plugin

Application
mPrint App (iOS)

Fonts / Graphics / Symbologies

Character Size
Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24
KOR, CHN, JPN: 24 x 24

Characters Per Line
SRP-330II: - Font A: 42 Font B, C: 56
KOR, CHN, JPN: 21
SRP-332II: - Font A: 48 Font B, C: 64
KOR, CHN, JPN: 24

Character Sets
Alphanumeric: 95
Extended Graphics:128 x 33 page
International: 32

Graphics
Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies
1D: Coda Bar, Code39, Code93, Code128,
EAN-8, EAN-13, ITF, UPC-A, UPC-E
2D: Data Matrix, PDF417, QR Code

Accessories

Standard
2 inch Partition (58 mm), USB A-B Cable 1.8m

Optional
External buzzer, B-Melodist

Made for iPod iPhone iPad



Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON

BIXOLON Co.,Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.Bixolon.com